


MICROELETTRICA SCIENTIFICA
M.S. RESISTANCES

M.S. RESISTANCES S.A.S
Z.I. du coin - Rue du Crêt de la Perdrix
42400 St CHAMOND / France
Tel : +33 477 29 39 80
Fax : +33 477 29 39 89



E-Mail: Sales@msresistances.com

SINGLE-POLE INDOOR DISCONNECTOR

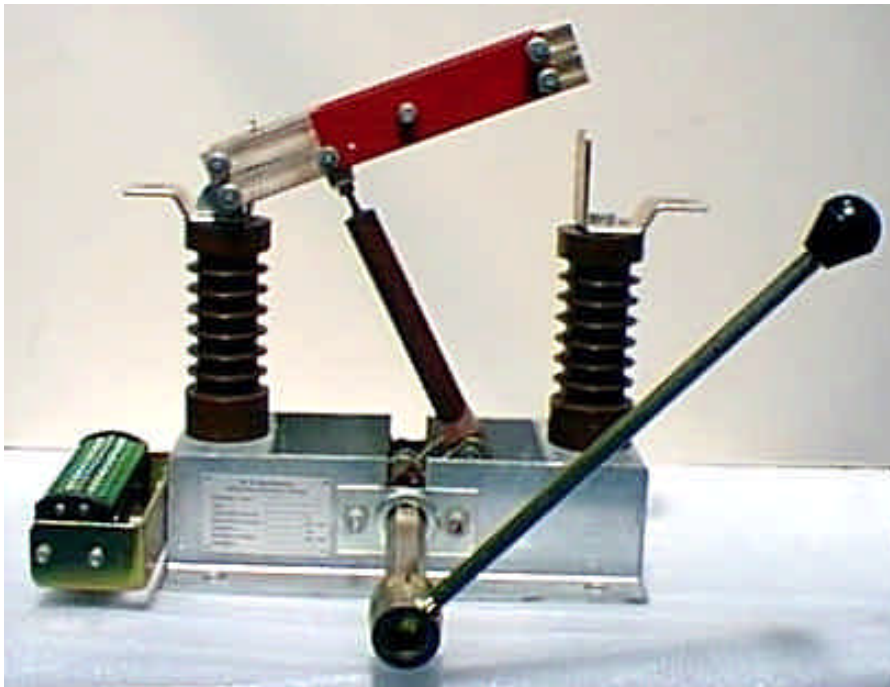

- ✓ *Designed to allow both vertical and horizontal mounting*
- ✓ *The twin sectioning blades and terminals are made of electrolytic copper. Terminals and contact surfaces of blades are silver plated.*
- ✓ *The framework is made of 5mm steel and electro-galvanized or hot dip galvanized*
- ✓ *The System includes 4N.O. & 4 N.C. Auxiliary contacts*
- ✓ *The System includes mechanical interlock*

M.S. RESISTANCES reserves all rights in this document and in the information contained therein. Any data contained therein may be changed without further notice. Reproduction, use or disclosure to third parties without express authority is strictly forbidden

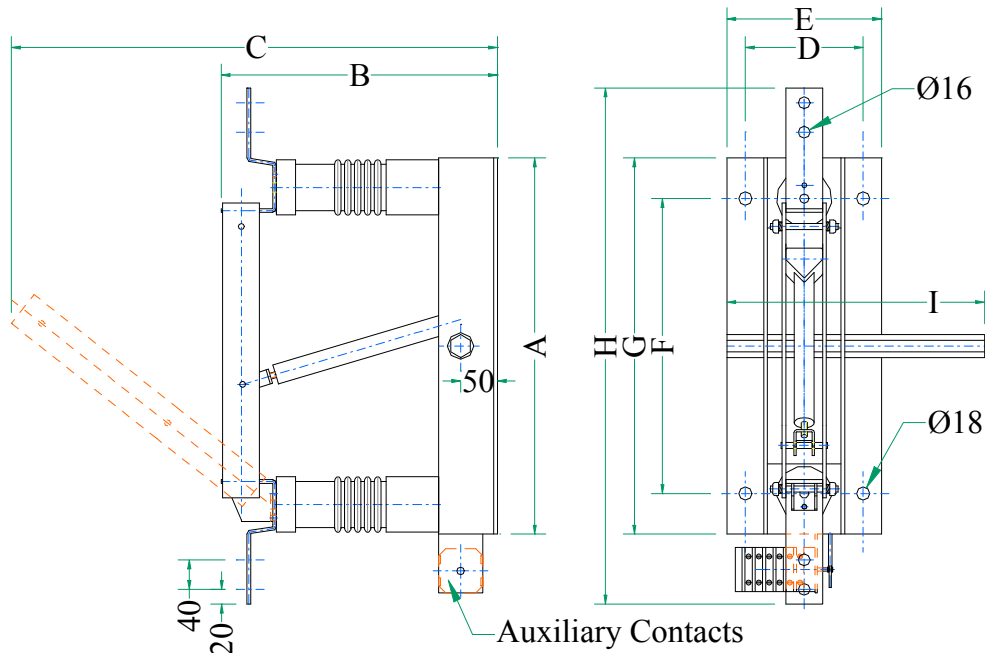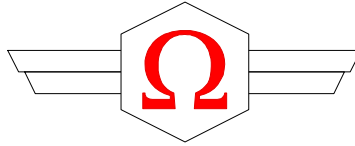

ELECTRICAL DATA

Type	Rated Voltage (kV)	Rated Current (A)	Short-Time Current (kA / 3sec)
SPID-12	12 kV	630 or 1250	20, 25 or 31.5 kA/3sec
SPID-17	17.5 kV		
SPID-24	24 kV		
SPID-36	36 kV		

MECHANICAL DATA

Type	Dimensions (mm)									Weight (kg)
	A	B	C	D	E	F	G	H	I*	
SPID-12	360	315	495	150	200	250	360	580	350	12
SPID-17	410	330	550	150	200	300	410	560	400	14
SPID-24	510	375	660	160	210	400	510	700	500	16
SPID-36	630	420	800	160	210	520	630	820	750	21

OPTIONS

- ✓ Auxiliary Contacts Block (up to 12 N.O. & 12 N.C.)
- ✓ Motorized Operation (48...110V_{dc} / 220V_{ac})
- ✓ Electromagnetic Interlock (48...110V_{dc} / 220V_{ac})
- ✓ IP54 Gasket System for Shaft